




PLT® - Mooring 75

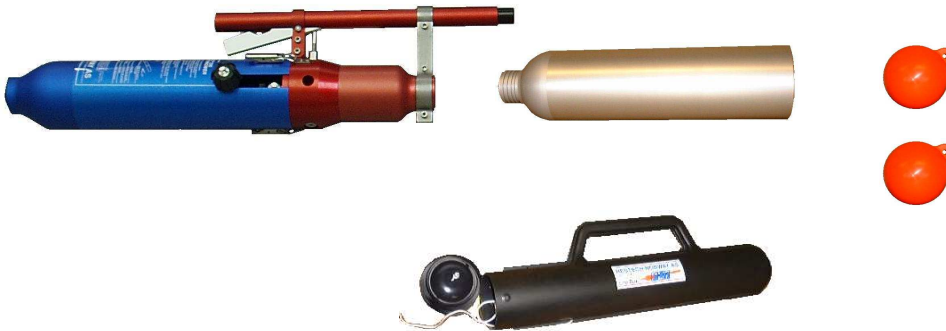

Art no 6000

Description:

The Mooring 75 has been designed for establishing a line connection between vessels, and for docking. The soft PVC-ball projectile will cause minimal damage if objects are hit. The ball is partly filled with air and partly with a coolant preventing it to freeze in arctic areas.

Base unit :

The base unit contains a built-in air cylinder for filling of compressed air up to 200/300 bars (2900/4350psi). This is sufficient for 4/6 shots before refilling is necessary. The air cylinder is fitted with standard fittings for diving and BA-equipment for filling of dry clean air from a high-pressure compressor.

Projectile:

The PLT® Mooring-75 is delivered with two soft PVC ball-projectiles partly filled with coolant to prevent freezing. The colour is orange and they are equipped with an attachment lug for fastening the line. The line-weight must not exceed 1,5kg/100m (3.3lb/109yd). We recommend using Linebox-75 or Linebox-75 HMPE for these projectiles.

Technical data:

Shooting range Depending on the line. When using a 5mm (0.2in) braided HMPE, max. 90m.
Recoil Max 5400N

Contents:

1 Art no 1005 PLT® Basic with Air Cylinder
1 Art no 6303 Launching Tube M 75
2 Art no 6101 Plastic Ball projectiles
1 Art no 6201 Linebox75 containing 120m/5mm (131yd/0.3in) braided polypropylene, breaking strength 4400N
1 CD/Users Manual.