


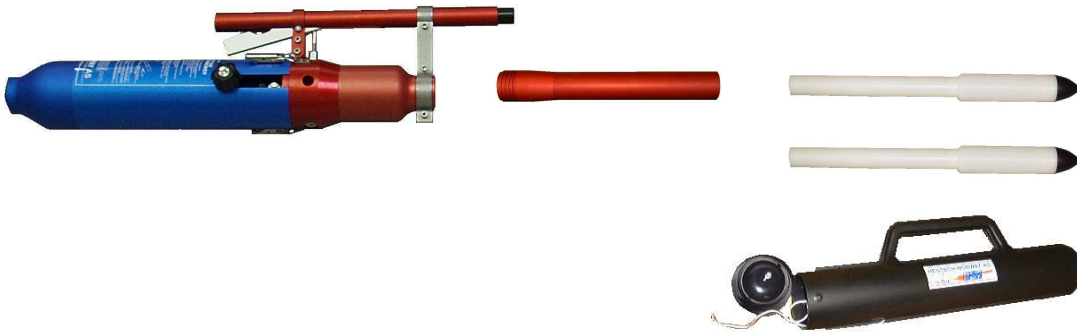

PLT® - Mooring 150

**Art no 5000****Description:**

The Mooring 150 is intended used as a working tool for establishing line connections from boat to boat, boat to dock or pier etc.

Base unit :

The base unit contains a built-in air cylinder for filling of compressed air up to 200/300 bars (2900/4350psi). This is sufficient for 4/6 shots before refilling is necessary. The air cylinder is fitted with standard fittings for diving and BA-equipment for filling of dry clean air from a high-pressure compressor.

Projectile:

The device is delivered with two projectiles M150. Made from white POM-plastic with a rubber tip. The projectile floats. As standard it comes with a Linebox with 3,2mm (0.13in) line, but there are several options regarding the line. Recommended line for mooring operations is art no 6203 containing 120m/5mm (131yd/0.2in) HMPE-line with a breaking strength of approx. 1.900kg (4190lb).

Technical data:

Shooting range depending on type of line.
 Ex: 3,2mm-1kg/250m (0.13in-4.4lb/274yd) gives a length of max 130m.
Recoil max 5400N.

Contents:

1 Art no 1005 PLT® Basic with Air Cylinder
1 Art no 3303 Launching Tube M 150
2 Art no 7004 Projectiles Mooring 150
1 Art no 5202 Line box-150 (150 metres (164yd) of 3,2mm (0.13in) braided polypropylene,
 breaking strength 2000N (440lb). Other options of line on request)
1 CD/Users Manual.